

## RECOMMENDED FOR USE IN:

Carriageways carrying continuous heavy traffic.

The Warrior surface box range has been specifically designed to offer fast and easy access to below ground networks matched with unrivalled durability. It is also available as a wide flanged variant for use with imperial sized chambers, in a modified option for motorway slot drain systems and a wide range of badged derivatives to identify the network below.



### LTS

FEATURE

## DURABILITY

To aid the reduction of whole life costs, the Warrior range incorporates the Load Transfer System (LTS) to radically improve installation and product lifespan lowering the frequency of reinstatement and replacement.

### A

GRADE

## PERFORMANCE

The unit is non rock and silent in operation. Large multi-directional wedge seatings enhance stability and durability which reduces whole life costs.



KITEMARK

## ACCREDITATION

Third party certified by BSI and kite marked to the requirements of BS 5834 and also meets with the performance requirements of BS750.

### >70

PSRV

## ROAD SAFETY

Radial raised chequer design with independently verified skid & slip resistance values.



FEATURE

## SECURITY


The Warrior range can be made anti-theft through the provision of a factory installed security chain.

## WARRIOR SURFACE BOX RANGE FOR USE IN CITY TRUNK ROADS CARRYING HEAVY TRAFFIC

SAP CODE STD UNIT	SAP CODE CHAINED	BS5834		PALLET QTY	CLEAR OPENING A x B (mm)	BASE SIZE C x D (mm)	DEPTH E (mm)	MASS (kg)	LIFTING KEY TYPE	PREVIOUS REF.	
		GRADE	PART							CODE STD UNIT	CODE WITH CHAIN
FSWA15CK	186962	A	2	80	150 x 150	225 x 225	100	8.5	TEE	HB50 1	HB50 1/AT
186972	186973	A	2	45	225 x 225	325 x 325	100	13.2	TEE	HB54 1	HB54 1/AT
186980	186981	A	2	20	300 x 300	400 x 400	100	20	TEE	HB58 1	HB58 1/AT
186935	186936	A	3	30	380 x 230	530 x 380	125	29.4	LOOP	HB36 1	HB36 1/AT
FSWA32EK	169303	A	3	30	380 x 230	505 x 355	125	26.2	LOOP	HB40 1	HB40 1/AT
186986	186987	A	2	40	150 x 150	262 x 250	225	13	TEE	HB80 1	HB80 1/AT

## WARRIOR SURFACE BOX RANGE FOR USE IN CARRIAGEWAY SLOT DRAIN APPLICATIONS

SAP CODE STD UNIT	BS5834		KITEMARK	CLEAR OPENING A x B (mm)	BASE SIZE C x D (mm)	DEPTH E (mm)	MASS (kg)	LIFTING KEY TYPE	PREVIOUS REF.
	GRADE	PART							
217233	A	2	YES	380 x 230	535 x 385	125	29	LOOP	HB37 1

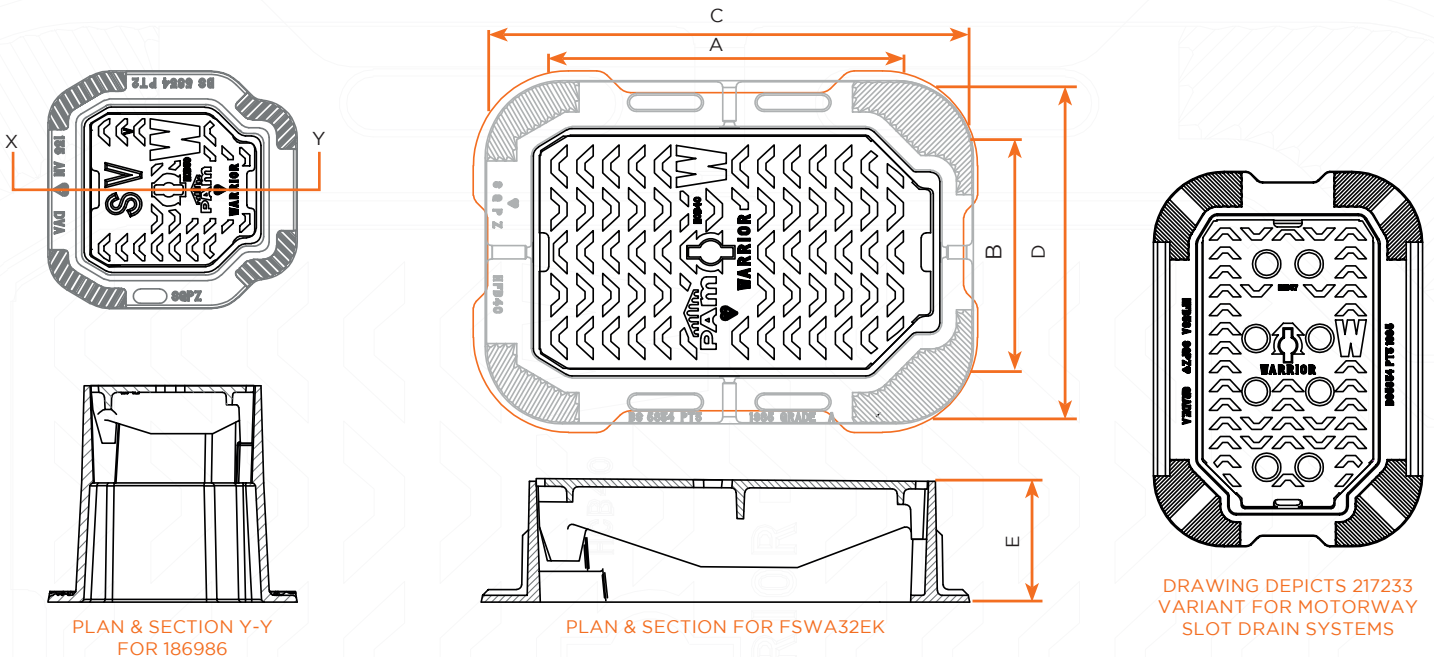

Standard badging options available include FH,AV,SV,WO,GAS, Meter, Water. Please contact us if alternative badging is required. Produced at Holwell Works, UK

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.

COPYRIGHT AND DESIGN RIGHT

This drawing is the exclusive property of Saint-Gobain PAM UK and is confidential and must not be reproduced or disclosed for any third party without written consent. It must be used only for the purpose for which it has been issued and is returnable on request.