


Channel grating **MECALINEA**
C250 class

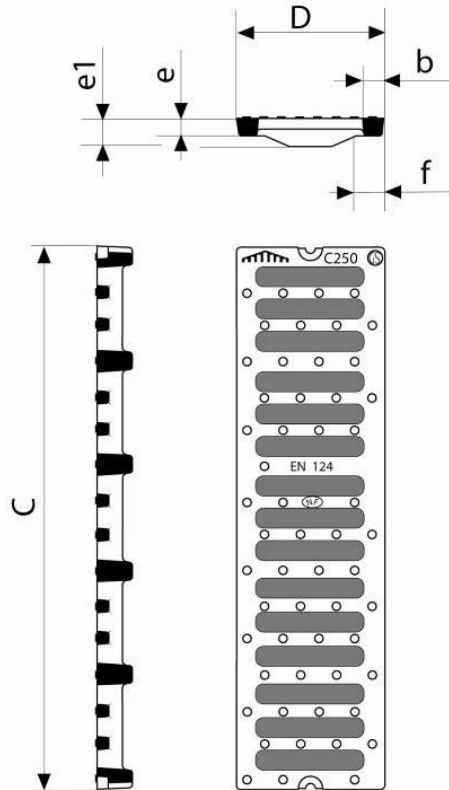

Dimensions (mm)						Mass (kg)	Waterway area (dm ²)	Packaging	Reference
C	D	b	f	e	e1				
750	200	28	35	27	40	16.1	5.46	30	ECML20PF
750	250			27		21.5			ECML25PF
750	300			27		26			ECML30PF
750	350			27		30			ECML35PF
750	400			27		35			ECML40PF
750	500			27		42			ECML50PF
750	600			27		54			ECML60PF
750	700			27		67			ECML70PF

Materials and coating:

Designation	Material	Coating
Grating	Ductile iron EN GJS 400-15	Bituminous coating

Field of application:

- C250 class (Group 3) according to standard EN 124, destined to the circulated pavements and similar locations exposed to the access of vehicles.

Mean features:

- Mechanical chaining. [\[Clic\]](#)
- Protection against theft, cannot be dismantled without tool.

Implementation [\[Clic\]](#)