



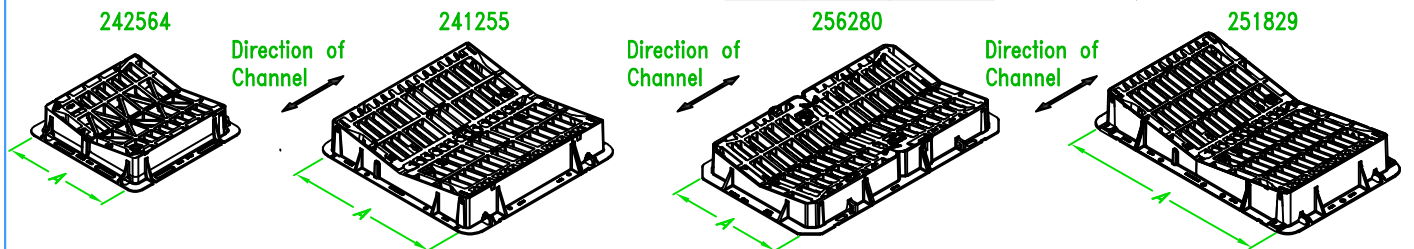

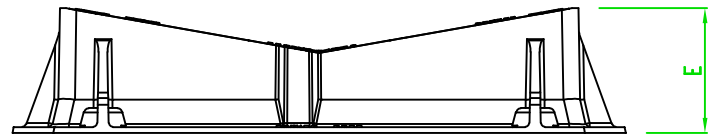
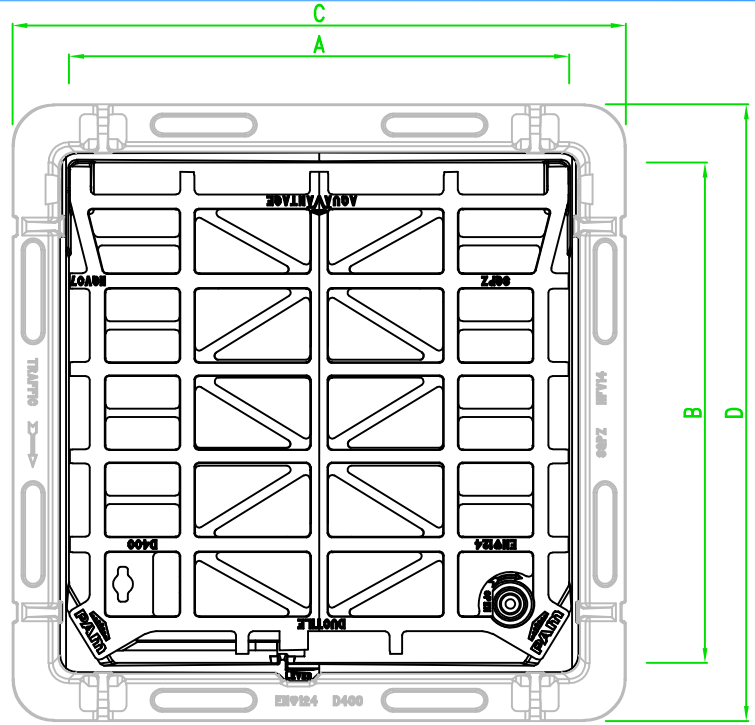


USE LIFTING KEY(S):

- 190668 (RMA57) 610mm LONG
- 190667 (RMA56) 467mm LONG

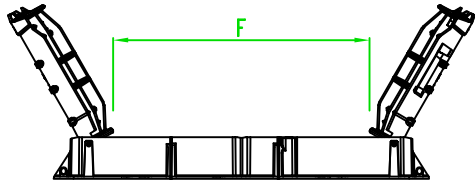

Locking/Lifting Key
for Hex Head locked Units
205435 600mm Long



The Profile of these Units approximates to the 1:5 standard drainage channel being a 10° fall
Retrospective fitting Locking Option available

SAP CODE	BS EN124 CLASS	CLEAR OPENING (A x B**)	OVER BASE (C x D**)	DEPTH (E)	ACCESS OPENING (F)	WATERWAY AREA sq. cm.	HA102 REF.	TOTAL MASS kg	BEARING PRESSURE N/mm ²	PALLET QUANTITY	PREVIOUS REF.
242564*	D400	600 x 600	738 x 742	150	486	2200	P	83	3.55	5	HV15 1*
241255	D400	900 x 900	1050 x 1020	180	697	5250	P	182	1.76	5	HV66 1
256280*	D400	675 x 1200	830 x 1355	150	925	4880	P	187	1.49	5	HV85 1*
251829	D400	1200 x 675	1356 x 809	200	1020	5110	P	178	1.87	3	HV86 1

* Removable Grate version ** Dimension along Direction of Channel

COPYRIGHT and DESIGN RIGHT
This drawing is the exclusive property of Saint Gobain PAM UK and is confidential and must not be reproduced or disclosed to any third party without written consent.
It must be used only for the purpose for which it has been issued and is returnable on request.

Produced at Holwell Works in UK



CLASS	APPLICATION	GROUP	KITEMARK	FEATURE	DRAWN	SPB	DATE	16/08/12	DRAWING TITLE	ISSUE
EN124		4		SPRING ARM LOCKING MECHANISM	UPDATED	JKH	DATE	29/09/17		
D400					CHECKED	PMH	DATE	19/10/17		
					APPROVED	NS	DATE	19/10/17		
									AquaVantage	20

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services and therefore reserve the right to change, without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.