




Product Data Sheet

UNICLASS L7315	
Cl/Sfb	(52.6)
March 2014	R1

VX-F040 Square Grating Stainless Steel

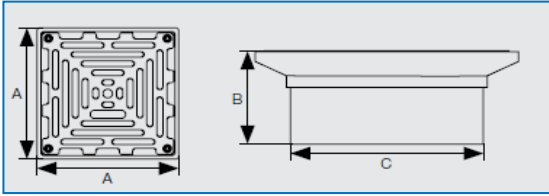

150x150mm Square Grating (NPSM threaded or Direct Fit)

GEN code	Material	FIT	Finish		A	B	C	WTKG	Grating free area (cm)
VX-F040	Stainless Steel	NPSM	Standard 227102	Polished 234176	150	57	110	1.2	119
VX-F040	Stainless Steel	Direct Fit	Standard 233421	Polished 234177	150	57	110	1.2	119

General Description

150 x 150mm square stainless steel grating with a NPSM thread or plain spigot for direct fit. Supplied in a standard finish or in a polished finish to order.

Technical Specification

Material: Stainless steel
Loading : K3

Compatible Items

NPSM grating: All cast iron Floor gullies VX-F200, VX-F210, VX-F220, VX-F230
Raising pieces VX-F350
Direct fit grating: Pipework 110mm OD
Ensign, EEZI-FIT, Timesaver 416, other materials 110mm OD
Timesaver 437 using a TD02 stepped coupling

Options: Removable bottle trap VX-F400
Filter basket VX-F410
Accessories : circular funnel VX-F310
Security screws (bag of 4) VX-F420

Flowrate@ 20mm head

Fitted to Medium Sump Gully = 2.6 L/s
Fitted to P Trap = 2.0 L/s
Fitted to S Trap = 1.7 L/s



Saint Gobain PAM
Lows Lane, Stanton-by-Dale
Ilkeston, Derbyshire, DE7 4QU
Sales : 0115 930 0630

Technical T:01952 262 529 F: 01952 262 592
E: technical.soildrain.uk.pam@saint-gobain.com

* PLEASE NOTE: At the time this data sheet was prepared all the data shown was accurate at the time of release.