




# Product Data Sheet

UNICLASS L7315	
Cl/Sfb	(52.6)
March 2014	R1

## VX-F080 Circular Grating for Vinyl Stainless Steel

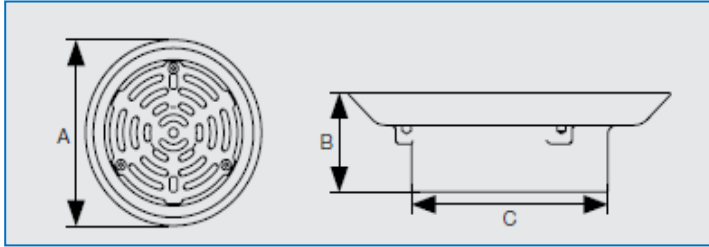

### 150mm Circular Grating (NPSM threaded or Direct Fit)

GEN code	Material	FIT	Finish		A	B	C	WTKG	Grating free area (cm <sup>2</sup> )
VX-F080	Stainless Steel	NPSM	Standard 227112	Polished 234197	150	53	110	2.1	72
VX-F080	Stainless Steel	Direct Fit	Standard 233435	Polished 234198	150	53	110	2.1	72

## General Description

150mm circular stainless steel grating for vinyl floors with a NPSM thread or plain spigot for direct fit. Supplied in a standard finish or in a polished finish to order.

## Technical Specification

**Material:** Stainless steel  
**Loading :** K3

## Compatible Items

**NPSM grating:** All cast iron Floor gullies VX-F200, VX-F210, VX-F220, VX-F230  
 Raising pieces VX-F350  
**Direct fit grating:** Pipework 110mm OD  
 Ensign, EEZI-FIT, Timesaver 416, other materials 110mm OD  
 Timesaver 437 using a TD02 stepped coupling

**Options**  
 Removable bottle trap VX-F400  
 Filter basket VX-F410  
 Accessories Oval /circular funnels VX-F305, VX-F300  
 Security screws (bag of 4) VX-F420

## Flowrate@ 20mm head

Fitted to Medium Sump Gully, Sumpless Gully and P Trap = 2.0 L/s  
 Fitted to S Trap = 1.7 L/s



Saint Gobain PAM  
 Lows Lane, Stanton-by-Dale  
 Ilkeston, Derbyshire, DE7 4QU  
 Sales : 0115 930 0630

Technical T:01952 262 529 F: 01952 262 592  
 E: technical.soildrain.uk.pam@saint-gobain.com

\* PLEASE NOTE: At the time this data sheet was prepared all the data shown was accurate at the time of release.