




Product Data Sheet

UNICLASS L7315	
Cl/Sfb	(52.6)
March 2014	R1

VX-F085 Circular Rodding Eye for Vinyl Stainless Steel

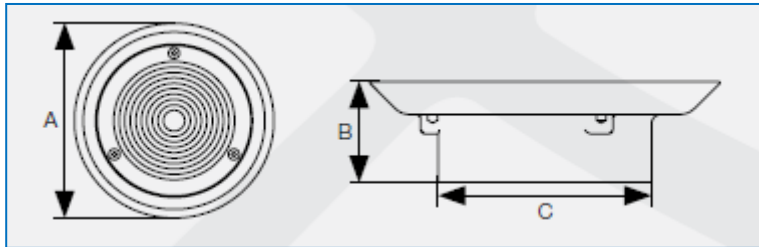

150mm Rodding Eye (NPSM threaded or Direct Fit)

GEN code	Material	FIT	Finish		A	B	C	WTKG	Grating free area (cm)
VX-F085	Stainless Steel	NPSM	Standard 227114	Polished 234201	170	53	110	2.2	N/A
VX-F085	Stainless Steel	Direct Fit	Standard 233439	Polished 234202	170	53	110	2.2	N/A

General Description

150mm circular stainless steel rodding eye for vinyl floors with a NPSM thread or plain spigot for direct fit. Supplied in a standard finish or in a polished finish to order.

Technical Specification

Material: Stainless steel
Loading : K3

Compatible Items

NPSM grating: All cast iron Floor gullies VX-F200, VX-F210, VX-F220, VX-F230
 Raising pieces VX-F350
Direct fit grating: Pipework 110mm OD
 Ensign, EEZI-FIT, Timesaver 416, other materials 110 OD
 Timesaver 437 using stepped coupling TD02

Options Security screws (bag of 4) VX-F420



Saint Gobain PAM
 Lows Lane, Stanton-by-Dale
 Ilkeston, Derbyshire, DE7 4QU
 Sales : 0115 930 0630

Technical T:01952 262 529 F: 01952 262 592
 E: technical.soildrain.uk.pam@saint-gobain.com

* PLEASE NOTE: At the time this data sheet was prepared all the data shown was accurate at the time of release.