




Product Data Sheet

UNICLASS L7315	
Cl/Sfb	(52.6)
March 2014	R1

VX-F200 Medium Sump Body

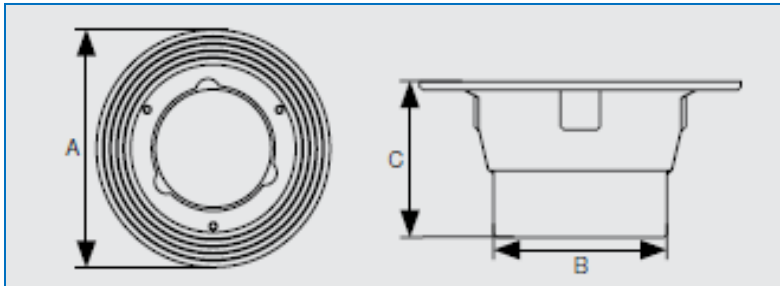

Medium Sump Body (110mm Outlet)

GEN code	SAP code	A	B	C	WTKG
VX-F200	227119	205	110	100	2.4

General Description

Cast iron gully 110mm OD outlet, NPSM flange thread and 3 weep holes
Flange can be fixed direct to the floor screed.

Technical Specification

Material: Cast iron – BS EN 1561
Coating: Grey epoxy to an average thickness of 70micron internally / externally
Connection: 110mm OD

Compatible Items

Gratings / Rodding eyes: VXF010 – VXF085 NPSM thread – Nickel Bronze / Stainless steel
Raising pieces: VX-F350
Clamping ring: VX-F205 (for damp proof membrane)
Pipework: Ensign, Timesaver 416, other materials 110mm OD
Timesaver 437 using TD02 stepped coupling

Flowrate@20mm head

Fitted with gratings = 2.0 to 3.0 L/s (depending on grating available on request)



Saint Gobain PAM
Lows Lane, Stanton-by-Dale
Ilkeston, Derbyshire, DE7 4QU
Sales : 0115 930 0630
Technical T:01952 262 529 F: 01952 262 592
E: technical.soildrain.uk.pam@saint-gobain.com

* PLEASE NOTE: At the time this data sheet was prepared all the data shown was accurate at the time of release.