




Product Data Sheet

UNICLASS L7315	
Cl/Sfb	(52.6)
March 2014	R1

VX-S260 Cast Iron Shower Drain Body

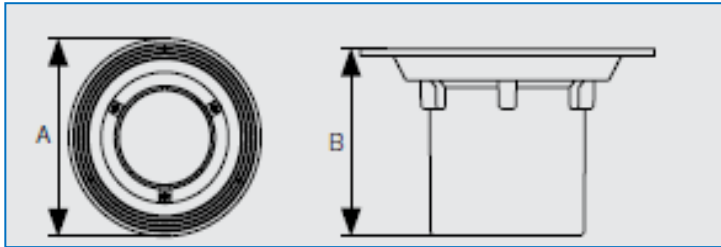

Cast Iron Vertical Shower Drain					
GEN code	SAP code	Size	A	B	WTKG
VX-S260	227125	110mm	210	130	2.4

General Description

110mm cast iron vertical spigot shower drain with 3xfixing screws for stainless steel gratings VX-S270 – VX-S271

Technical Specification

Material: Cast iron – BS EN 1561
Coating: Grey epoxy to an average thickness of 70micron internally / externally
Connection: 110mm OD

Compatible Items

Gratings Stainless steel: VX-S270, VX-S271
Removable bottle trap: VX-F400
Pipework: Ensign, Timesaver 416, other materials 110mm OD
 Timesaver 437 using TD02 stepped coupling

Flowrate

Flowrate through gully trapped with VX-F400 and S/S grating @ 20mm head = 1.1 L/s



Saint Gobain PAM
 Lows Lane, Stanton-by-Dale
 Ilkeston, Derbyshire, DE7 4QU
 Sales : 0115 930 0630

Technical T:01952 262 529 F: 01952 262 592
 E: technical.soildrain.uk.pam@saint-gobain.com

* PLEASE NOTE: At the time this data sheet was prepared all the data shown was accurate at the time of release.