


UNICLASS G5811: L7312	
Cl/Sfb	(52.5)
2019	

## EF014 – Round Door Access Pipe

Product code	Dia	A	B	C	WTKG
191516	50	175	60	74	1.6
191517	70	205	65	96	2.0
191518	100	250	80	116	3.1
191519	150	280	110	170	6.2

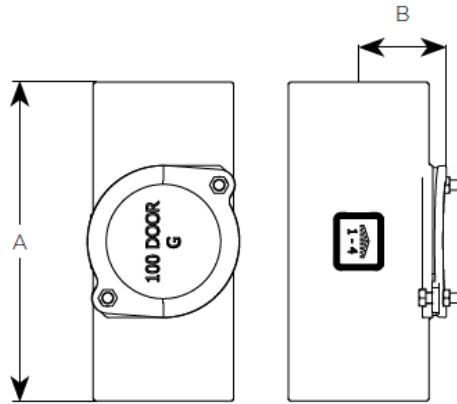


### General Description

Round Door Access Pipe


### Technical Specification

- Product code:** See Table  
**Standard:** BS EN 877: 1999/AC: 2008  
**Material:** Cast Iron – BS EN 1561  
**External Coating:** Red epoxy to an average thickness of 70microns  
**Bolts:** Zinc & Clear Mild Steel Hex Head Bolts (M8)  
**Nuts:** Zinc & Clear Mild Steel Hex Head Nuts (M8)  
**Gasket Material:** EPDM Rubber EN 681  
**Component Fire Rating:** A1  
**System Fire Rating:** A1  
**Water Temperature Rating:** 95° +/- 2° (Resistance to Hot Water in 24hr cycle constant)

### Product Identification



### CE Marking Certificate

 SAINT-GOBAIN PAM UK Lows Lane Stanton-by-Dale - Ilkeston Derbyshire DE7 4QU 08	
Unique identification code of the product-type: E001A Declaration of Performance N°DoP-001UK AVCP: 3 for reaction to fire (Range) 4 for all other characteristics EN 877:1999/AC:2008 Cast iron pipes and fittings, their joints and accessories for the evacuation of water from buildings <b>ENSGIN S (Soil) Range</b> Pipes, fittings and couplings DN 50-600	
Reaction to fire	A1
- Cast iron	A1
- Range	A1
Internal pressure strength	Conform
Dimension tolerances	Conform
Impact resistance	Conform
- Mechanical properties (pipes)	
• Tensile strength	300 MPa (average value)
• Ring crush strength	450 MPa (average value)
• Brinell hardness	220 HB (average value)
Tightness	Conform
- Water tightness *	
Internal pressure DN ≤ 200	≥ 5 bar
DN > 200	≥ 3 bar
* excluded flexible couplings, joints connecting to sanitary ware ...)	
Durability	Conform
- External coatings	
• Pipes	Acrylic/Conform
• Fittings	Epoxy/Conform
- Internal coatings	
• Pipes **	Epoxy/Conform
• Fittings **	Epoxy/Conform
** including resistance to salt spray	≥ 1500 h

### Saint Gobain PAM

Lows Lane, Stanton-by-Dale  
 Ilkeston, Derbyshire, DE7 4QU

Sales : 0115 930 0630

Technical T:01952 262 529 F: 01952 262 592

E: technical.soldrain.uk.pam@saint-gobain.com

\* PLEASE NOTE: At the time this data sheet was prepared all the data shown was accurate at the time of release.

