


UNICLASS G5811: L7312	
Cl/Sfb	(52.5)
2019	

EF090T – Single Boss pipe

Product code	Dia	A	WTKG
191847	100	155	1.7

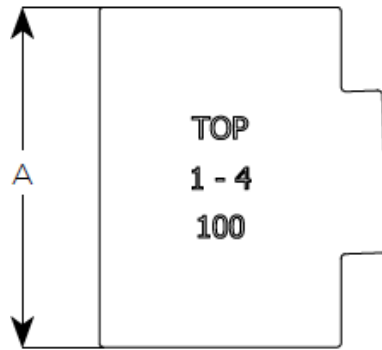


General Description

Single Drilled & Tapped 2" BSPT Boss Pipe


Technical Specification

Product code:	See Table
Standard:	BS EN 877: 1999/AC: 2008
Material:	Cast Iron – BS EN 1561
Coating:	Red epoxy to an average thickness of 70microns
Thread:	2" BSPT Thread
Component Fire Rating:	A1
System Fire Rating:	A1
Water Temperature Rating:	95° +/- 2° (Resistance to Hot Water in 24hr cycle constant)

Product Identification



CE Marking Certificate

 SAINT-GOBAIN PAM UK Lows Lane Stanton-by-Dale - Ilkeston Derbyshire DE7 4QU 08	
Unique identification code of the product-type: E001A Declaration of Performance N°DoP-001UK AVCP: 3 for reaction to fire (Range) 4 for all other characteristics EN 877:1999/AC:2008 Cast iron pipes and fittings, their joints and accessories for the evacuation of water from buildings ENSIGN S (Soil) Range Pipes, fittings and couplings DN 50-600	
Reaction to fire - Cast iron - Range Internal pressure strength Dimension tolerances Impact resistance - Mechanical properties (pipes) • Tensile strength • Ring crush strength • Brinell hardness Tightness - Water tightness * Internal pressure DN ≤ 200 DN > 200 * excluded flexible couplings, joints connecting to sanitary ware ...	A1 A1 Conform Conform Conform 300 MPa (average value) 450 MPa (average value) 220 HB (average value) Conform ≥ 5 bar ≥ 3 bar
Durability - External coatings • Pipes • Fittings - Internal coatings • Pipes ** • Fittings ** ** including resistance to salt spray	Conform Acrylic/Conform Epoxy/Conform Epoxy/Conform Epoxy/Conform ≥ 1500 h

Saint Gobain PAM

Lows Lane, Stanton-by-Dale
 Ilkeston, Derbyshire, DE7 4QU

Sales : 0115 930 0630

Technical T:01952 262 529 F: 01952 262 592

E: technical.soldrain.uk.pam@saint-gobain.com

* PLEASE NOTE: At the time this data sheet was prepared all the data shown was accurate at the time of release.

