

## RECOMMENDED FOR USE IN:

Carriageways carrying continuous heavy traffic where frequent access and maintenance to drainage network is required.

A single piece hinged grating makes maintenance and cleaning operations easier and safer. Available in a choice of left hand, right hand or kerb-facing hinge orientations, the Rexus grating range can be used on any road, including one-way system.



### DURABILITY

To aid the reduction of whole life costs, the Rexus grating incorporates the Load Transfer System (LTS) to radically improve installation and product lifespan lowering the frequency of reinstatement and replacement



### SECURITY

A hinged grating and an integral automatic spring bar locking mechanism combine to offer enhanced anti-theft and security capabilities. Security can be increased further as the Rexus has the capability to have a turnbuckle locking kit fitted retrospectively



### HEALTH & SAFETY

To help reduce work-related injuries, an ergonomic hinged design makes opening simpler, easier and safer to access the drainage network



### PERFORMANCE

The unit is non rock and silent in operation. Large multi-directional wedge seatings enhance stability and durability which reduces whole life costs



### ACCREDITATION

Third party certified by BSI and kite marked to the requirements of BS EN 124. Compliant to the requirements of Highways England advice note HA104/09





### WATER CLEARING EFFICIENCY



An efficient water clearing capacity aids the effective removal of surface water

## REXUS D400 HINGED GRATING RANGE

SAP CODE	BS EN124 CLASS	CLEAR OPENING A x B (mm)	OVER BASE C x D (mm)	FRAME DEPTH E (mm)	WATERWAY AREA (cm <sup>2</sup> )	HA102/00 GRATING TYPE	TOTAL MASS (kg)	PALLET QUANTITY	PREVIOUS REF.
211145	D400	600 x 600	800 x 800	100	1870	N/A	88	14	H465 1
* 211608	D400	600 x 600	800 x 714	100	1870	Q	85	14	H456 L
** 211607	D400	600 x 600	800 x 714	100	1870	Q	85	10	H466R 1

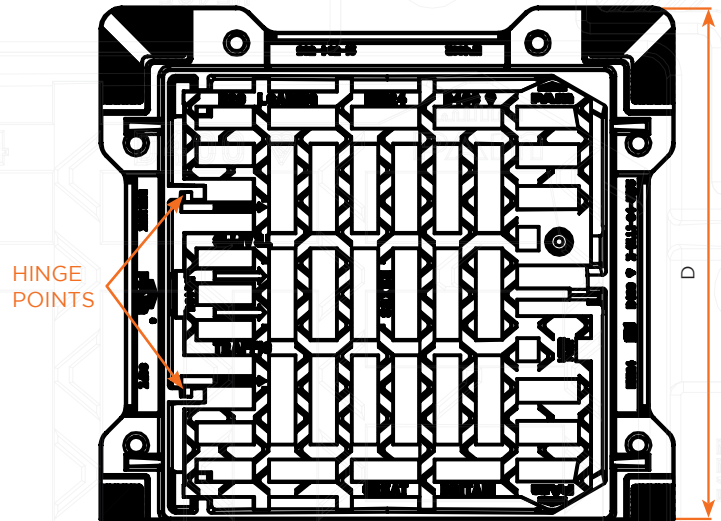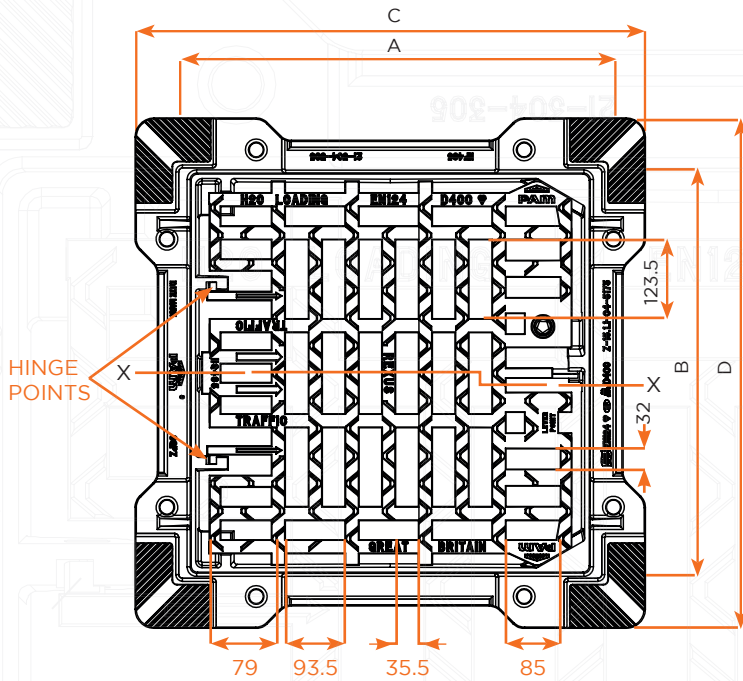

RIGHT HAND VERSION

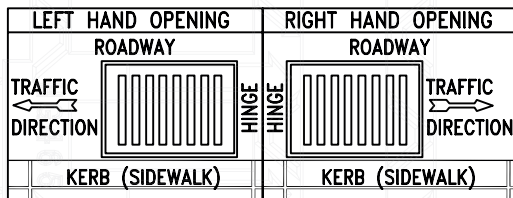

SECTION X-X

\* Left Hand Opening  
 \*\* Right Hand Opening  
 Produced at Holwell Works, UK

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.

COPYRIGHT AND DESIGN RIGHT

This drawing is the exclusive property of Saint-Gobain PAM UK and is confidential and must not be reproduced or disclosed for any third party without written consent. It must be used only for the purpose for which it has been issued and is returnable on request.

68 EN124 D400 Z-15.1.1-04-5175