




# Product Data Sheet

UNICLASS L7315	
Cl/Sfb	(52.6)
March 2014	R1

## VX-S261 Cast Iron Shower Drain Body

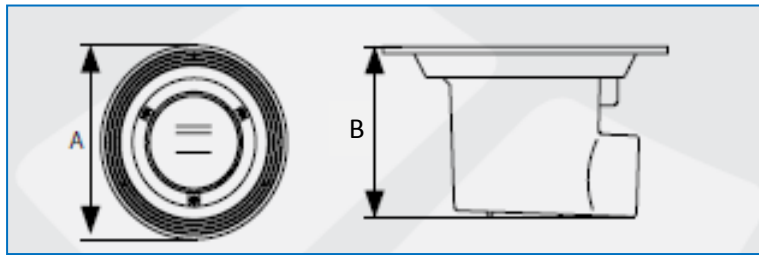

Cast Iron Horizontal Shower Drain					
GEN code	SAP code	Size	A	B	WTKG
VX-S261	227127	60mm	210	121	2.5

### General Description

60mm cast iron horizontal spigot shower drain with 3xfixing screws for stainless steel Gratings VX-S270 – VX-S271.

### Technical Specification

**Material:** Cast iron – BS EN 1561  
**Coating:** Grey epoxy to an average thickness of 70micron internally / externally  
**Connection:** 60mm OD

### Compatible Items

**Gratings Stainless steel:** VX-S270, VX-S271  
**Removable bottle trap:** VX-F400  
**Filter basket S/S:** VX-F410  
**Pipework:** Ensign, Timesaver 416, other materials 60mm OD

### Flowrate

Flowrate through gully trapped with VX-F400 and S/S grating @ 20mm head = 0.9 L/s



Saint Gobain PAM  
 Lows Lane, Stanton-by-Dale  
 Ilkeston, Derbyshire, DE7 4QU  
 Sales : 0115 930 0630

Technical T:01952 262 529 F: 01952 262 592  
 E: technical.soildrain.uk.pam@saint-gobain.com

\* PLEASE NOTE: At the time this data sheet was prepared all the data shown was accurate at the time of release.